

EN



Industrial vacuums for dirt & solids

APS

Vacuum cleaner for dust and solids, for maintenance and industrial cleaning applications, combining powerful suction and robustness.

APS vacuum cleaners are appreciated by the industry for their suction power and robust design.

They offer a wide choice of motorizations, capacities, filtration as well as special versions adapted to specific problems (stainless steel, BigBag...)

Choose a single-phase version for recurrent maintenance and cleaning work. Choose a three-phase version for intensive continuous use or integration into a machine process.

The APS technology is also present on the ROLLAIR centralized systems with the automatic evacuation of chips and fluids.



THE RANGE



OTHER VERSIONS



BigBag / GEOBOX

The BigBag mounted APS allows for a tenfold increase in capacity for fixed applications.



Continuous bagging.

The solution for quick removal of collected dust and solids.

DETAILS



A. Cyclonic separation

The tangential inlet in the vacuum cleaner tank effectively separates dust and solids from the air stream.




B. Improved handling

The dust container is lockable and mounted on wheels for easy emptying.



C. High performance filtration

Dual-stage filtration consisting of a filter guard for durability, a class M filter and HEPA filtration (optional).

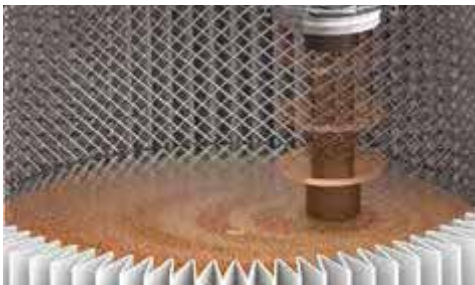

D. Semi-automatic unclogging

Maintain suction power with vibration filter cleaning. Optional E-JET system.



E. Cleanliness and ergonomics

The trolley-mounted accessory holder allows easy access to the various attachments.



F. APS 102 M

Supplied with accessory Ø38 mm polyethylene kit.

OPTIONS



Chip separator basket

With gravity draining of the sucked liquids.



Bag holding

For direct suction into a bag.



Coupled floor sweeper

Ideal for cleaning floors, 600 mm wide with wheels.




Pneumatic powered

Connect your vacuum cleaner to the compressed air network.



Floor sweeper with lips

Ideal for cleaning floors. 450 mm wide with wheels + metal cane.



E-JET

Pneumatic filter cleaning system.

SPECIFICATIONS

The APS range of professional vacuum cleaners is dedicated to the suction of dusts and solids. Nevertheless, they are also capable of vacuuming liquids for specific tasks.

Available in several versions, the range offers a wide choice of capacity, flow and suction power to adapt to each use.

You will also find APS technology for intensive use and processing of very large volumes on ROLLAIR installations

with automated chip and liquid evacuation.




102 M / 202 M 350 D 203 / 303 ST 305 511P ECLEAN 1000 BP 300 P50

| | 102 M / 202 M | 350 D | 203 / 303 ST | 305 | 511P ECLEAN | 1000 BP | 300 P50 |
|----------------------------------------|-----------------------------|-----------------|------------------------------|-----------------|-----------------|---------------|-----------------|
| Capacity (liters) | 25 / 35 | 50 | 35 / 50 | 75 | 160 | 100 | 50 |
| Materials / finitions | Stainless steel | Stainless steel | Stainless steel | Stainless steel | Stainless steel | Epoxy paint | Stainless steel |
| Power supply | 230V mono | 230V mono | 3x400V 50Hz | 3x400V 50 Hz | 3x400V 50 Hz | 3x400V 50 Hz | Pneumatique |
| Power (kW) | 2,2 | 3,3 | 3 | 5,5 | 11 | 4 | |
| Filtler cleaning | Semi-auto | Semi-auto | Semi-auto | Semi-auto | Auto | Auto | Auto |
| Max vacuum (mmH₂O) | 2300 | 2300 | 2900 | 2900 | 2900 | 440 | 3800 |
| Max air flow (m³/h) | 340 | 510 | 320 | 520 | 1040 | 2500 | 380 |
| Suction hose diameter (mm) | Ø38 / Ø40 | Ø50 | Ø40-50 / Ø50 | Ø50 / Ø60 | Ø80 | Ø150 | Ø50 |
| Dimensions (mm) | 480x480x920 500x620x1100 | 600x800x1180 | 500x620x1270 600x800x1300 | 630x800x1800 | 770x1550x1850 | 840x1460x1750 | 600x800x1150 |
| Weight [without options] (kg) | 24 / 42 | 65 | 72 / 87 | 151 | 350 | 260 | 64 |

ACCESSORY KIT (Ø40, Ø50 AND Ø60)

| | Kit poussières | Kit huile et copeaux |
|----------------------------------------------------------------|----------------|----------------------|
| 1. Semi-rigid PE-metal cane (90 cm) | option | option |
| 2. Straight PE cane (90 cm) | • | • |
| 3. Flat spout (120 mm width) | • | • |
| 4. Flat beveled spout | • | • |
| 5. Anti-static suction hose with knurled screwed sleeves (3 m) | • | |
| 6. Reinforced suction hose with knurled screwed sleeves (3 m) | | • |
| 7. Wide brush floor nozzle (+ metal cane) | • | |
| 8. Wide floor nozzle with lips (+ metal bent cane) | | • |

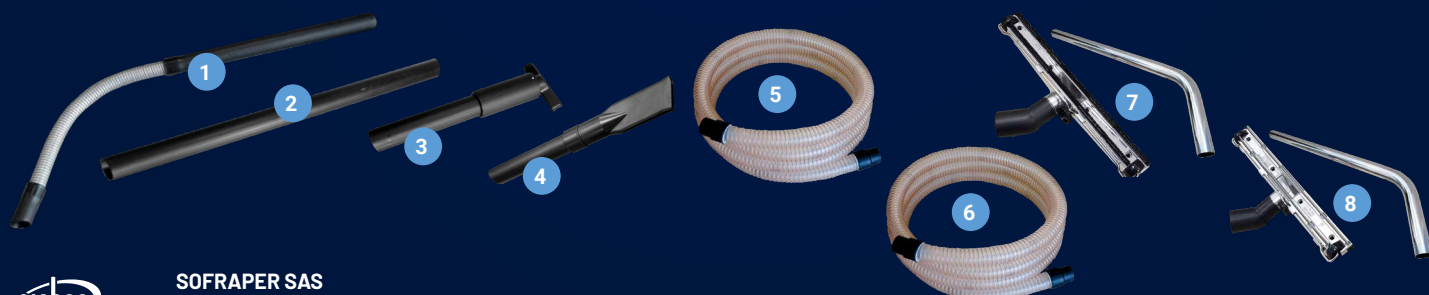

SOFRAPER SAS

15 chemin des bois | 73100 Ville-la-Grand | FRANCE
contact@sofraper.com | +33 4 76 93 12 09 | www.sofraper.com